


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 21 TOWNSHIP 15 RANGE 3
DATE: -02-21-60-- 7-5-05
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County:

IN. S.P.C. E ZONE, NAD 83
NAME: 15032105
N: 497529.5008(m)
E: 53743.4244(m)

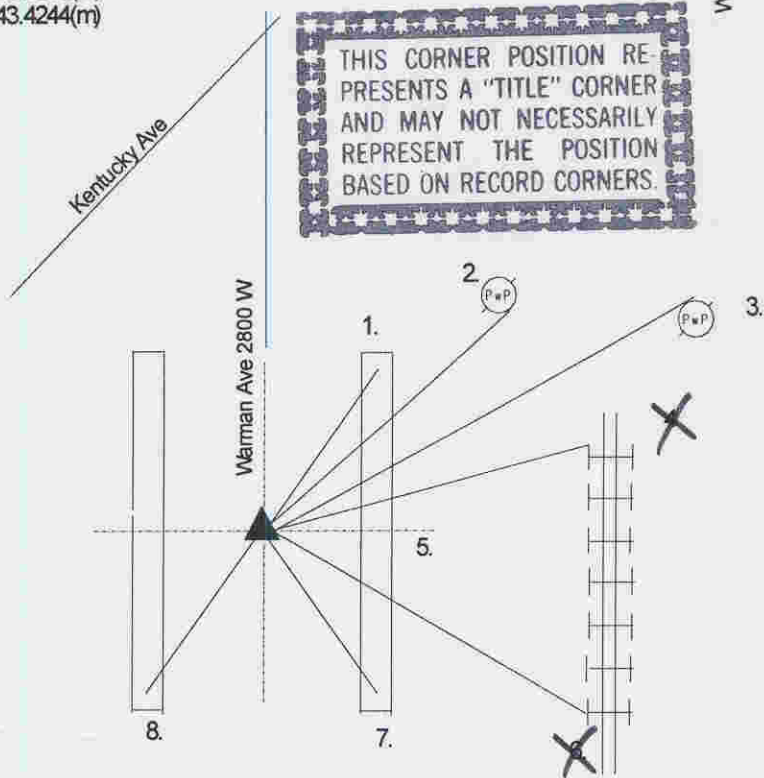

A survey by H.B. Fatout on September 30, 1852 indicates a stone with the following witnesses: 20' oak N, W68 22" oak N 48 3/4 W 98 links per Wayne Township Legal Survey Book pg. 52. Monroe 4-6-60 called a steel pin over stone. Reference by Miller 9-10-75 called a railroad spike. Greene 2-24-87 called the same. Gries 5-20-88 called a 3/4" pin in a 1 1/2" pipe. Wilcoxon 10-20-96 called a railroad spike found 2' down. A mag nail was set over the spike. Excavated 8-1998 by Wilcoxon and a railroad spike was found 2' down. A steel pin found 12' down over a stone. A stone found 18' down. Harrison set. Re-tied 20-21-00 by Wilcoxon.

HC532105

| REF. | DISTANCE | DESCRIPTION |
|------|-------------------|---|
| 1. | 17.79' | Cut 'X' N-end on concrete wall |
| 2. | 25.20' | PK nail SE PWP#172-601B 18'up |
| 3. | 57.92' | PK nail N PWP#164-601B 18'up |
| 4. | 36.78' | NWedge of I beam "Glock-Yard Sign" |
| 5. | 7.84' | Due E to face of concrete wall |
| 6. | 46.80' | SWedge of I beam |
| 7. | 12.87' | Cut 'X' S-end of concrete wall |
| 8. | 47.58' | Cut 'X' S-end of concrete wall |
| | | |
| | | |
| | | |
| | | |
| | | |